
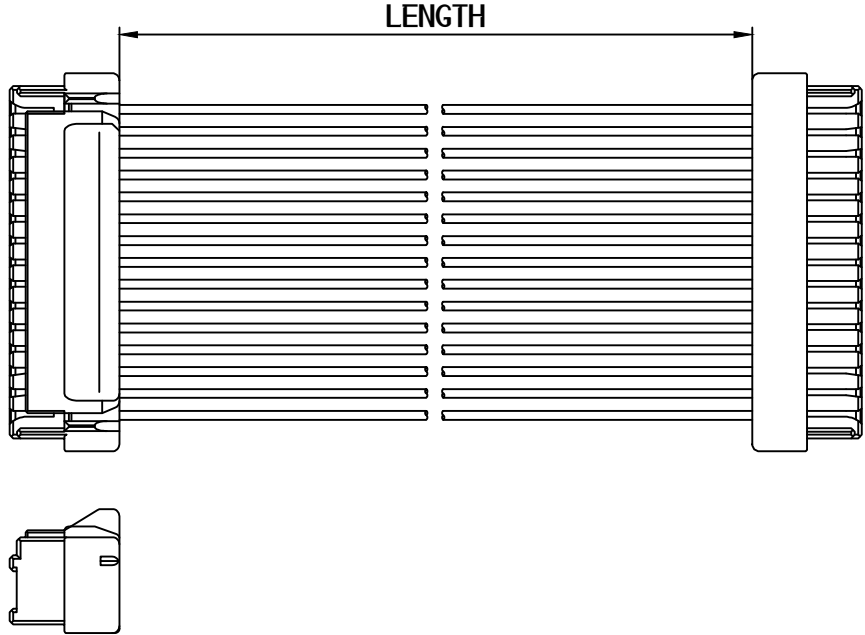


1	2	3	4	5
REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	-	NEW RELEASED	2015.05.12	CLARA



Material:

- . Housing: PBT, White, UL94V-0
- . Contact: Copper alloy, Tin-plated

Technical Data:

- . Rated Voltage: 100V AC, DC
- . Rated Current: 2A
- . Rated Temperature: -25°C~+85°C
- . Contact resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.
- . Insulation resistance: 500M Ω min.
- . Withstanding voltage: 500V AC/minute
- . Applicable Wire: 24AWG~28AWG
- . Matched with Contact: SPD-002T-P0.3

www.bomcan.com



This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

DESCRIPTION	ZPDR-30V-S CONNECTOR TERMINAL CABLE WIRING HARNESS			
DWG NO	HARNESS ZPDR	BOMCAN PART No	-	
DRAWN BY	CLARA 2015.05.12	CUSTOMER P/N	-	
CHECKED BY	CALEB 2015.05.12	SIZE: A4	SHEET	UNIT
APPROVED BY	BILL 2015.05.12	REV: AA	1 of 1	MM
			SCALE	Third angle projection
			FREE	