
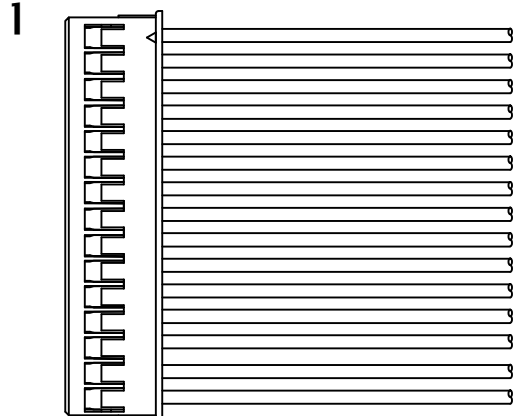


REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	-	NEW RELEASED	2015.05.12	CLARA

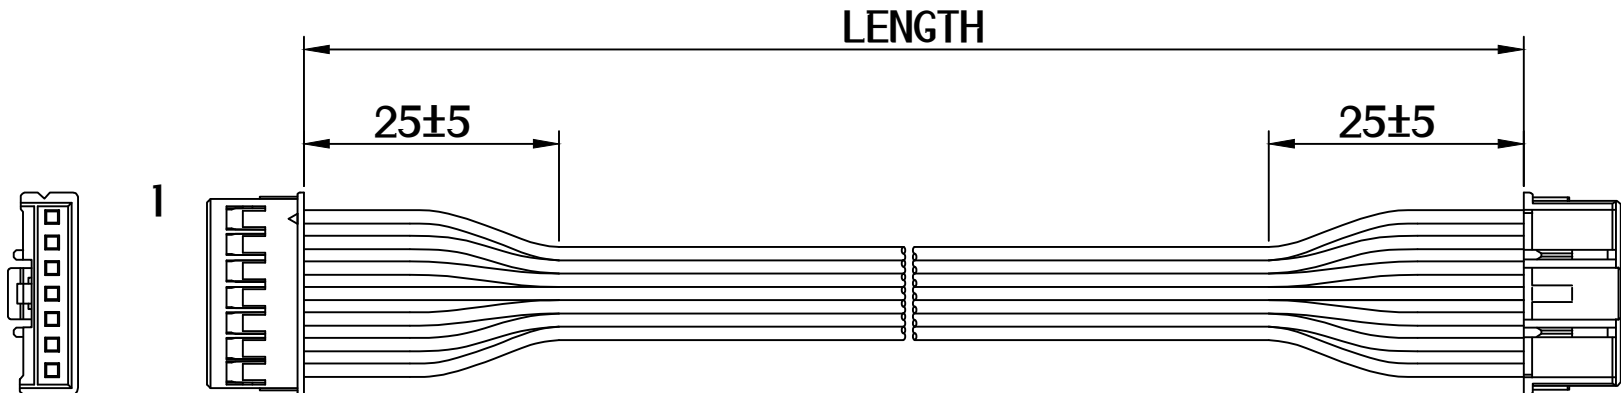

Material:

- Housing: PA66, White, UL94V-0
- Contact: Phosphor bronze, Tin-plated

Technical Data:

- Rated Voltage: 250V AC, DC
- Rated Current: 3A
- Rated Temperature: -25°C~+85°C
- Contact resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.
- Insulation resistance: 1000M Ω min.
- Withstanding voltage: 1000V AC/minute
- Applicable Wire: 22AWG~28AWG
- Matched with Contact: SXA-001T-P0.6



This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

DESCRIPTION	2~15PINS XAP CONNECTOR WITH LOCK TERMINAL CABLE WIRING HARNESS			
DWG NO	HARNESS-XAP	BOMCAN PART No	-	
DRAWN BY	CLARA 2015.05.12	CUSTOMER P/N	-	
CHECKED BY	CALEB 2015.05.12	SIZE: A4	SHEET	UNIT MM
APPROVED BY	BILL 2015.05.12	REV: AA	1 of 1	
		SCALE	FREE	Third angle projection

www.bomcan.com

A

B

C

1

2

3

4

5

A4