




1		2		3		4		5	
REV	ECN NO	DESCRIPTION		DATE	APPROVED				
AA	-	NEW RELEASED		2015.05.12	CLARA				

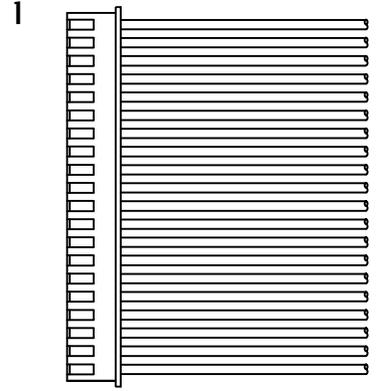

- Material:**
- . Housing: PA66, White, UL94V-0
 - . Contact: Phosphor bronze, Tin-plated
- Technical Data:**
- . Rated Voltage: 250V AC, DC
 - . Rated Current: 3A
 - . Rated Temperature: -25°C~+85°C
 - . Contact resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.
 - . Insulation resistance: 1000M Ω min.
 - . Withstanding voltage: 1000V AC/minute
 - . Applicable Wire: 22AWG~28AWG
 - . Matched with Contact: SXH-001T-P0.6

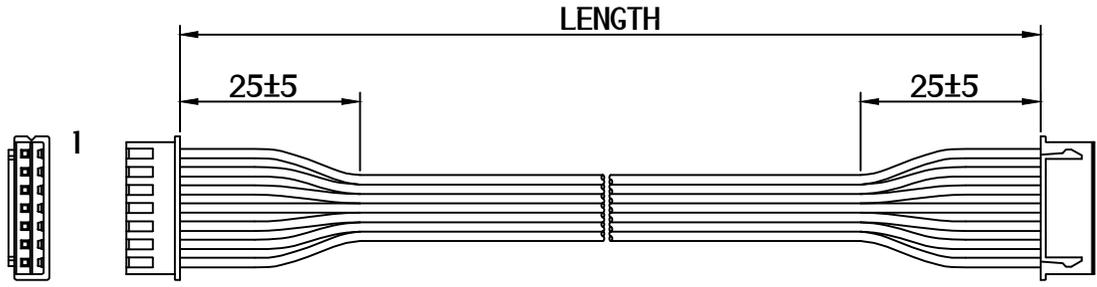

This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

DESCRIPTION	2~20PINS XHP CONNECTOR TERMINAL CABLE WIRING HARNESS						
DWG NO	HARNESS-XHP	BOMCAN PART No		-			D
DRAWN BY	CLARA 2015.05.12	CUSTOMER P/N		-			
CHECKED BY	CALEB 2015.05.12	SIZE: A4	SHEET	UNIT	SCALE	Third angle projection	
APPROVED BY	BILL 2015.05.12	REV: AA	1 of 1	MM	FREE		